

International Journal of
Engineering Research and Science & Technology



ISSN : 2319-5991

www.ijerst.com

Email: editor@ijerst.com or editor.ijerst@gmail.com

Multi- Traffic Scene Perception Based on Supervised Learning

Mr. D.Konda Babu ¹, Ch Akanksha ²,
S Vaasanthi Bodi ³, Boddu Ramu ⁴, M V Sai Krishna ⁵

Abstract:

Traffic accidents are particularly serious on a rainy day, a dark night, an overcast and/or rainy night, a foggy day, and many other times with low visibility conditions. Present vision driver assistance systems are designed to perform under good-natured weather conditions. Classification is a methodology to identify the type of optical characteristics for vision enhancement algorithms to make them more efficient. To improve machine vision in bad weather situations, a multi-class weather classification method is presented based on multiple weather features and supervised learning. First, underlying visual features are extracted from multi-traffic scene images, and then the feature was expressed as an eight-dimensions feature matrix. Second, two supervised learning algorithms are used to train classifiers. The analysis shows that extracted features can accurately describe the image semantics, and the classifiers have high recognition accuracy rate and adaptive ability. The proposed method provides the basis for further enhancing the detection of anterior vehicle detection during night time illumination changes, as well as enhancing the driver's field of vision on a foggy day.

Keywords – Underlying visual features, supervised learning, intelligent vehicle, complex weather conditions, classification.

I. Introduction

Highway traffic accidents bring huge losses to people's lives and property. The advanced driver assistance systems (ADAS) play a significant role in reducing traffic accidents. Multi-traffic scene perception of complex weather condition is a piece of valuable information for assistance systems. Based on different weather category, specialized approaches can be used to improve visibility. This will contribute to expand the application of ADAS. Little work has been done on weather related issues for in-vehicle camera systems so far. Payne and Singh propose classifying indoor and outdoor images by edge intensity. Lu et al. propose a sunny and cloudy weather classification method for single outdoor image. Lee and Kim propose intensity curves arranged to classify fog levels by a neural network. Zheng et al. present a novel framework for recognizing different weather conditions. Milford et al. present vision-based simultaneous localization and mapping in changing outdoor environments.

ASSISTANT PROFESSOR¹
DEPT OF INFORMATION TECHNOLOGY
PRAGATI ENGINEERING COLLEGE(A),SURAMPALEM(EAST GODAVARI)A.P,INDIA

Detecting critical changes of environments while driving is an important task. In driver assistance systems. Liu et al. propose a vision-based skyline detection algorithm under image brightness variations. Fu et al. propose automatic traffic data collection under varying lighting conditions. Fritsch et al. use classifiers for detecting road area under multi-traffic scene. Wang et al. propose a multi-vehicle detection and tracking system and it is evaluated by road way video captured in a variety of illumination and weather conditions. Satzoda and Trivedi propose a vehicle detection method on seven different datasets that captured

varying road, traffic, and weather conditions. However, there is always some risk to investment in market due to its unpredictable behavior. weather prediction is a classic problem which has been analyzed extensively using techniques of supervised Learning. The successful prediction of weather could prevent some of accidents. So, an intelligent prediction model for weather forecasting would be highly desirable and would be of wider interest. Machine learning techniques are very popular in building real-time application model which provide better result than other methods.

Image feature extraction is the premise step of supervised learning. It is divided into global feature extraction and local feature extraction. In the work, we are interested in the entire image, the global feature descriptions are suitable and conducive to understand complex image. Therefore, multi-traffic scene perception more concerned about global features, such as color distribution, texture features. Image feature extraction is the most important process in pattern recognition and it is the most efficient way to simplify high-dimensional image data. Because it is hard to obtain some information from the $M \times N \times 3$ -dimensional image matrix. Therefore, owing to perceive multi-traffic scene, the key information must be extracted from the image. Many methods have been developed to predict weather conditions related data using various techniques and models. we need data along with factors where we select machine learning with other techniques just because they give us the better results than the other random prediction model. Supporting vectors in machine learning can provide the classification and few other trending models such as deep neural network etc. Data collection is very important in this aspect as we rely

on the data very much as we know predicting the weather. So data must capture based on the model if we are predicting for intraday trading then we have to capture the data every minute or so that we can train the model in real time. If we are trying to predict fog, rainy and night conditions then we have to collect the data based on that. This Project uses PyQt tool to create the needed Graphical User Interfaces, PyUIC module to automatically generate the code. PyUic tool is used automatically generate the code for the Front-end user interfaces created by PyQt. All the front-end python code is automatically generated by this tool, by converting the user interface (.ui) files into .py files. We can compare the supervised algorithms for accuracy. This

algorithms are used for predict and detect accuracy of traffic. supervised learning algorithm will be introduced to solve the multi traffic scene classify problem. Image feature extraction is the premise step of supervised learning. it is divided into global feature extraction and local feature extraction.

II. RELATED WORK

Automatic detecting and counting vehicles in unsupervised video on highways is a very challenging problem in computer vision with important practical applications such as to monitor activities at traffic intersections for detecting congestions, and then predict the traffic /of which assists in regulating traffic. Manually reviewing the large amount of data, they generate is often impractical.

H.S. Mohana [45-47] ET.AL., developed a new approach in detecting and counting vehicles in day environment by using real time traffic flux through differential techniques. Counting object pixel and background pixel in a frame leads to the traffic flux estimation. The basic idea used is variation in the traffic flux density due to presence of vehicle in the scene. In this paper a simple differential algorithm is designed and tested with vehicle detection and counting application. Traffic flux estimation will play vital role in implementing vehicle detection and counting scheme. Real time dynamic scene analysis has become very important aspect as the increase in video analysis. The technique developed is having simple statistical background. Dynamic selection of images from the sequence is implemented successfully in order to reduce the computation time.

The designed technique are evaluated such a 20 different video sequences and weighed thoroughly with simple confidence measures. To make the design illumination invariant, a section of the background is taken as reference, which will not be affected by the traffic flow. Threshold is fixed and used to discriminate the low, medium and high traffic flux. There is a plot for traffic flux density; it's basically 1% flux density versus number of frames scene, then there is a flux change according to vehicle size. Obviously if there is big vehicle (or object), there is maximum or if there is small vehicle (or object), there is minimum amount of flux (white pixels).


Laura Munoz ET.AL., [50] proposed a system to estimate traffic density with the cell transmission model. This uses cell densities as state variables instead of cell occupancies, and also accepts non uniform cell lengths, and allows congested condition to be maintained at the downstream boundary of a modeled freeway section. Using cell densities instead of cell occupancies permits to include uneven cell lengths, which leads to greater flexibility in partitioning the highway.

Tomas Rodriguez ET.AL., [51] proposed a system on real-time traffic monitoring; the system is self-adaptive and is able to operate autonomously for long periods of time, i.e. no hidden parameters to be adjusted. It performs in all-weather condition and automatically selects the appropriate algorithm for day, night and transition periods. The system is robust against fast and slow illumination changes and is able to cope with long broken shadows, and shadows from parallel roadways. Ordinary camera movements (i.e. wind vibrations) hardly affect its performance because the system is tolerant against temporal tracking errors and strict constraints are used to identify the vehicles. They also provide an adequate treatment of occlusions and heavy vehicles, and obtained reasonable results in dense traffic. An exhaustive analysis of the operational environment; an effective calibration and image rectification method; an original segmentation approach, complemented with an innovative method for the automatic selection of the segmentation parameters; a detection and tracking approach specially designed for traffic environments. In recent research, the Hidden Markov model was used in classifying the traffic congestion state automatically.

Another approach is using a static Support Vector Machine (SVM) approach to model the traffic flow in real-time. Compared with the HMM approach, the SVM approach simplifies both training and testing processes and offers a strict real-time process. Unfortunately, similar with a HMM approach, the static SVM could not work correctly on a video sequence with anomalies in its background such as a static shadow. Additionally, the whole process required certain huge number of training samples to achieve good performance. On the other hand, a background modeling approach has been widely used in shadow detection and is able to complement a traffic density estimation process. However, it is problematic under different weather conditions, rapid changing illumination and traffic congestion.

III. SYSTEM FRAMEWORK

The first step in this is collection of raw data from the various sources and the data of the organization. From the raw data we can extract the attributes which are used for the prediction. After extraction, we can train the data model using these previous datasets. Here we should give Testing data(input) to data analytical tool it will compare data with the trained data and gives the Predicted price as output to us.

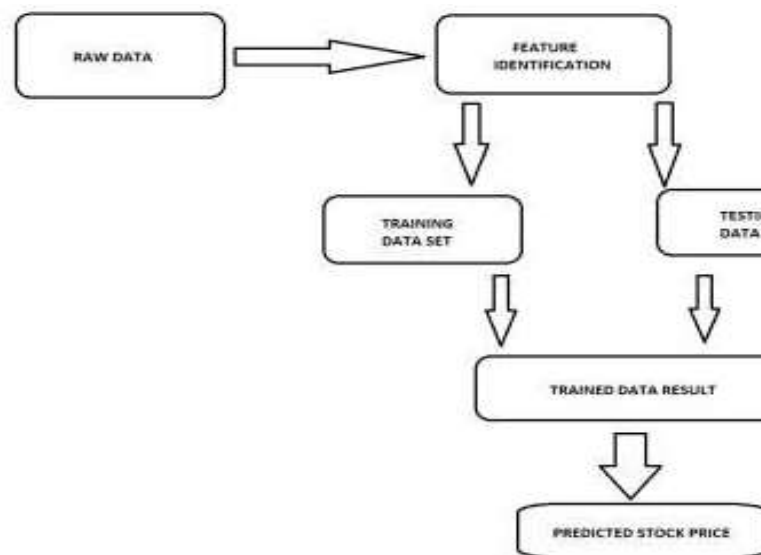

A.ALGORITHM :

We used the python panda's library for data processing which combined different datasets into a

data frame. The raw data makes us to prepare the data for feature identification. We also quantified the accuracy by using the predictions for the test set and the actual values.

Step1: Importing Data manipulation library files.

//Pandas

Step2: preprocessing

- i. converts rgb to gray color image
- ii. noise removal

Step3: Feature Extraction

i. feature representation Such as, color features, texture features and edge features.

- ii. average gray
- iii. standard deviation
- iv. variance
- v. average gradient
- vi. spatial frequency
- vii. edge intensity

Step4: Supervised learning algorithms

i. each image will be transformed into a learning bag by extracting features.

After extracted global and local features, machine learning classification approaches come into operation.

ii. A histogram intersection kernel and support vector machine classifiers are presented for image classification

iii. PNN are calculated by neurons, the models are different. A new function is used to create the BP network and a new pnn function is used to create a probabilistic neural network.

Step5: calculate feature value i.e., ACCURACY, PRECISION AND RECALL

Step6: predict and detect accuracy of traffic.

B.MODULES

I. Data Collection

Firstly, Dataset can be collected from various sources of any organization. The right dataset helps for the prediction and it can be manipulated as per our requirement. Our data is in the form of images it may be based on night, fog, and rainy. The data can be collected from the organization based on the areas where the weather can be seen unusual. By collecting these it makes accurate in prediction.

II. Data Processing

All the data was collected, the data is in the form of the images. Images are collected by the use of driving recorder and the image set is established for training.in the first step the matching values for all

pixels and all disparities are calculated. In the second step the disparity values are interpolated to sub-pixel accuracy by fitting a quadratic curve to the matching values in the neighborhood of the best matching value.

III. Training the Data

Deploying the Model After the data has been prepared and transformed, the next step was to build the classification model using the support vector classifier technique. This technique was selected because the construction of support vector classifiers does not require any domain knowledge. By using the attribute, we have considered in the dataset we train the model by using the algorithm. The training sets are used to tune and fit the models.

IV. Deploying the model

The classification rules are generated from the support vector. The trained data can be used for the Testing the data. It helps to give the output or accurate prediction of weather using this model.

IV.CONCLUSION

This project entitled “Multi-traffic scene perception using Machine Learning” is useful in predicting accurate weather conditions based on images like night, fog and rainy, and thereby to guide their customers accordingly. The proposed system is also useful to reduce the traffic issues and accident issues. This helps finally leads to the improvement of vision image enhancement. This finally leads to the improvement of predict and detect accuracy of traffic.

REFERENCES :

1. C. Lu, D. Lin, J. Jia, and C.-K. Tang, “Two-class weather classification,” IEEE Trans. Pattern Anal. Mach. Intell., vol. 39, no. 12, pp. 2510–2524, Dec. 2017.
2. Y. Lee and G. Kim, “Fog level estimation using non-parametric intensity curves in road environments,” Electron. Lett., vol. 53, no. 21, pp. 1404–1406, Dec. 2017.

3. J. M. Milford, E. Vig, W. Scheirer, and D. Cox, "Vision-based simultaneous localization and mapping in changing outdoor environments," *J. Field Robot.*, vol. 31, no. 5, pp. 814–836, Sep./Oct. 2014.

4. H. Kuang, X. Zhang, Y. J. Li, L. L. H. Chan, and H. Yan, "Nighttime vehicle detection based on bio-inspired image enhancement and weighted score-level feature fusion," *IEEE Trans. Intell. Transp. Syst.*, vol. 18, no. 4, pp. 927–936, Apr. 2017.

5. O. Regniers, L. Bombrun, V. Lafon, and C. Germain, "Supervised classification of very high-resolution optical images using wavelet based textural features," *IEEE Trans. Geosci. Remote Sens.*, vol. 54, no. 6, pp. 3722–3735, Jun. 2016.